

济南儒祺商贸有限公司

JINAN RUQI TRADING CO., LTD

乐陵市博宇建筑五金有限公司

LAOLING BOYU BUILDING HARDWARE CO., LTD.

单品技术文件 Single technology file

Contact: VICTOR LIU

Tel: +86186 6016 9418

(WeChat&WhatsApp)

Website: www.boyuwj.com

连杆

Friction stay hinge



四连杆

Friction stay hinge/4-arm



连杆

Friction stay hinge

需要确认的问题:

1.槽口类型 (13.5铝合金/18塑钢/22幕墙)

2.连杆材质 (SS304/202)

3.连杆长度 (A), 厚度 (D)

槽口宽度 (B), 开启角度(C°)

四连杆/五连杆/六连杆 (E)

4.窗户承重

Need to be confirmed :

1.The types of notch(13.5aluminium/18upvc/22curtain)


2.Material of friction stay hinge (SS304/202)

3.The length of friction stay hinge(A),thickness

(D)notch'width(B),opening angle(C°)

Friction stay hinge/4arms/5arms/6arms(E)

4.The window's load bearing

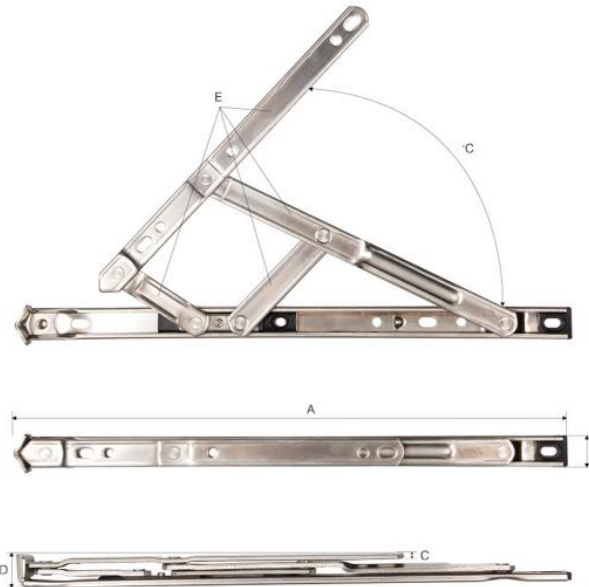

A	8"、10"、12"、14"、16"、18".....36"
B	18
C	2.0、2.5、3.0
$^{\circ}C$	27.5 $^{\circ}C$ 、35 $^{\circ}C$ 、45 $^{\circ}C$ 、87 $^{\circ}C$
D	16
E	四连杆、五连杆、六连杆 4 arms friction hinge,5 arms friction hinge,6 arms friction hinge
承重 / 两支 Load bearing/two pcs	40 / 60 / 80 / 100 / 120 / 160 / 180KG

安装好的效果图

(Installed renderings)





谢谢观看

THANK YOU